

V1200-QP Zero Client for VMware and Amazon WorkSpaces Tera2 PCoIP® Portal Processor

Industry Leading VDI Performance

Model Numbers: V1200-QP, V1200-QPS, V1200-QPF

The 10ZiG V1200-QP is part of our V1200 Tera2 PCoIP® Zero Client Series optimized for VMware and Amazon WorkSpaces environments. With no operating system and no local storage, the V1200 Series line provides an ultra-secure yet powerful and easy to manage endpoint that eliminates the chance of viruses and provides extensive USB security and authentication features. With options ranging from dual through quad screen, PoE, Fiber, DVI-I, DVI-D and Internal Smart Card (CAC) with up to 6 USB 2.0 ports as well as standard TAA Compliance on all V1200 Series Zero Clients, you can be confident in finding a device that will fit your ideal use case environment.

The V1200-QPD model highlighted below supports quad screens and comes equipped with 4 x DVI-D and 4 x USB 2.0, along with an optional Internal (CAC) Smart Card Reader and Fiber. All 10ZiG V1200 Series PCoIP® Zero Clients receive a one-year, free subscription to the Teradici Desktop Access Plan. The Desktop Access Plan includes the Teradici Management Console with a subscription to firmware and security updates as well as tech support.

Internal (CAC) Smart Card Model


DVI-D Model



| |
|--|
| ▶ Tera2 PCoIP Portal Processor, Tera2140 PCoIP Chipset |
| ▶ 4 x DVI-D |
| ▶ 4 x USB 2.0 |
| ▶ Optional Internal (CAC) Smart Card Reader |
| ▶ Optional Fiber |
| ▶ TAA Compliant |
| ▶ 1 year free subscription to Teradici Desktop Access Plan |

V1200-QP Zero Client

Tera2 PCoIP Zero Client Series

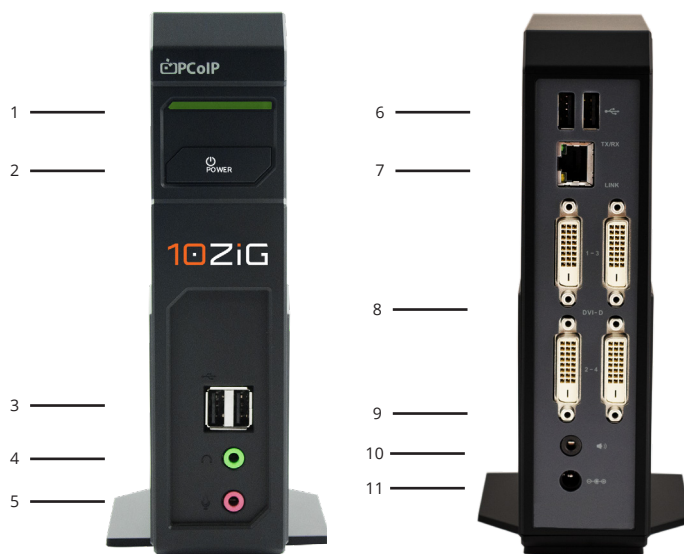

SPECIFICATIONS

1. Power On Indicator Light
2. Power Button
3. USB 2.0 (2)
4. Front Line Out
5. Mic In
6. USB 2.0 (2)
7. RJ45 LAN Port
8. DVI-D (4)
9. Kensington Lock
10. Rear Line Out
11. DC Jack

| System Specifications | |
|---|--|
| Management Utility | Teradici Management |
| Form Factor | Slim Line |
| Processor | Teradici PCoIP® Portal Processor - TERA2 |
| Chipset | TERA2140 PCoIP® |
| Dimensions | |
| Device | 5.22"(D) x 1.76"(W) x 7.21"(H) - 150mm x 130mm x 45mm |
| Weight | 1.81 lbs (0.82 kg) |
| Connections | |
| Ports | 4 x USB 2.0, 4 x DVI-D, 1 x Mic In, 2 x Line Out, RJ-45 LAN, 1 x DC Jack |
| Video Resolution | 2 Monitors at 2560 x 1600* or 4 Monitors at 1920 x 1200 |
| Networking | |
| Ethernet | 10/100/1000 Base-T |
| Fiber | Optional SFP Fiber Connector (100/1000Mbps) |
| Environmental | |
| Operating Temp. | 32-104F (0-40C), 10-90% non-condensing humidity |
| Power | 12 Watts, DC-12V/3A External Power Adapter |
| Certifications | |
| CE, FCC, CAN ICES-3/NMB-3, VCCI, UL, TUV-GS, C-Tick, GOST, BSMI, RoHS | |

* 2 x 2560 x 1600 requires the Hi-Res Video Cable (Part No: 9017)



Americas
EMEA
APAC
DE

P: +1 (866) 865-5250
P: +44 (0) 116 214 8650
P: +61 2 80027421
P: +49(0) 6724 934-45

E: info@10ZiG.com
E: info@10ZiG.eu
E: info@10ZiG.com.au
E: vertrieb@10zig.de

W: www.10ZiG.com

